



ИБП Newave Conceptpower DPA (8-200 кВт) - технические спецификации. Юниджет

Постоянная ссылка на страницу: <https://www.uni-jet.com/catalog/ibp/on-line-ibp/abb-conceptpower-dpa-series/>



The logo for newave, featuring the word "newave" in a lowercase, sans-serif font. The "n" and "e" are in a teal color, while "wave" is in a brown color. A teal swoosh underline is positioned below the letters.

Conceptpower DPA™ Technical Specifications

The logo for newave, featuring the word "newave" in a lowercase, sans-serif font. The "n" and "e" are in a teal color, while "wave" is in a brown color. A teal swoosh underline is positioned below the letters.

Modular

Safe-swap

Watch

Continuous Power Protection Availability



Conceptpower DPA™ highlights at a glance

- DPA with Safe-Swap Modules (SSM)
For premium power protection availability
- Low total Cost of Ownership (TCO)
Cost saving during entire life-cycle
- Flexibility/Scalability
Ease of power upgrade, pay as you grow
- Enhanced Serviceability
Rapid fault recovery
- Link to Newavewatch™
Instantaneous fault recognition

Safe-Swap Modular Power Protection

Power range: 8-200KW per rack

Specifications are subject to change without notice

TABLE OF CONTENTS

- 10.1 CONCEPTPOWER DPA SYSTEM DESCRIPTION..... 3**
- 10.2 TECHNICAL CHARACTERISTICS..... 4**
 - 10.2.1 MECHANICAL CHARACTERISTICS MD-FRAMES AND MODULES..... 4
 - 10.2.2 MECHANICAL CHARACTERISTICS MX-FRAMES AND MODULES..... 5
 - 10.2.3 POWER SELECTION TABLE CONCEPTPOWER DPA MODULES..... 6
- 10.3 INPUT CHARACTERISTICS..... 6**
 - 10.3.1 GRAPH: INPUT PF VERSUS % LOAD..... 7
 - 10.3.2 GRAPH: INPUT DISTORTION THDI VERSUS % LOAD..... 7
- 10.4 BATTERY CHARACTERISTICS..... 8**
- 10.5 OUTPUT CHARACTERISTICS..... 8**
 - 10.5.1 GRAPH: AC – AC EFFICIENCY with Linier load @ cosphi 1 9
 - 10.5.2 GRAPH: Output Power in KW and KVA VERSUS cosphi..... 9
- 10.6 ENVIRONMENTAL CHARACTERISTICS 10**
- 10.7 STANDARDS..... 10**
- 10.8 COMMUNICATION..... 11**
 - 10.8.1 POWER MANAGEMENT DISPLAY (PMD)..... 11
 - 10.8.2 MIMIC DIAGRAM..... 11
 - 10.8.3 DISPLAY..... 11
 - 10.8.4 CUSTOMER INTERFACES (Terminals X1...X4)..... 12
 - 10.8.5 CUSTOMER INPUTS DRY PORT s: Terminal block X1..... 12
 - 10.8.6 CUSTOMER OUTPUTS DRY PORTs : Terminal blocks X2, X3, X4..... 12
- 10.9 OPTIONS..... 13**
 - 10.9.1 MODEM/ETHERNET CARD / Newavewatch™ MANAGEMENT SOFTWARE..... 13
 - 10.9.2 SNMP card / WaveMon Management Software..... 14
 - 10.9.3 BATTERY CABINETS..... 14
- 10.10 BATTERY AUTONOMIES..... 15**
 - 10.10.1 MD Modules: Examples of Internal Battery Autonomy..... 15
 - 10.10.2 MD Modules: Examples of External Battery Autonomy 15
 - 10.10.3 MX Modules: Examples of Internal Battery Autonomy..... 16
 - 10.10.4 MX Modules : Examples of External Battery Autonomy..... 16
- 10.11 INSTALLATION PLANNING..... 17**
 - 10.11.1 HEAT DISSIPATION PER MODULE WITH NON-LINEAR LOAD..... 17
- 10.12 WIRING AND BLOCK DIAGRAMS FOR ALL FRAMES AND MODULES..... 18**
 - 10.12.1 TERMINAL CONNECTIONS OVERVIEW 18
 - 10.12.2 SINGLE FEED INPUT 19
 - 10.12.3 DUAL FEED INPUT..... 20

10.1 CONCEPTPOWER DPA SYSTEM DESCRIPTION

In environments that demand zero downtime, continuous power protection availability is essential. In order to respond to today's dynamic IT and process-related environments that experience daily change through new server technologies, migration and centralization, resilient and easily adaptable power protection concepts are required.

CONCEPTPOWER DPA is the foundation for continuous power protection availability of network-critical infrastructures in enterprise data centers where business continuity has paramount importance and in process control environment where manufacturing continuity is essential.

NEWAVE CONCEPTPOWER DPA'S is a second generation high-power-density (HPD), leading-edge double-conversion power protection technology that has standardized on a modular component approach which helps speed deployment, improve adaptability and increase system availability while reducing total cost of ownership.

CONCEPTPOWER DPA'S is a unique on-demand architecture that integrates the power rack, power distribution unit, back-up battery rack and monitoring and management solutions to allow easy selection of optimized configurations.

CONCEPTPOWER DPA'S (Distributed Parallel Architecture) provides highest availability, unmatched flexibility and at the same time lowest cost of ownership in IT environments.

This Technical Specification provides detailed technical information on the mechanical, electrical and environmental performance of the CONCEPTPOWER DPA that can support to give answers to tender and end-user requirements. The CONCEPTPOWER DPA was designed to respond to the most stringent safety, EMC and other important UPS standards.

CONCEPTPOWER DPA is a rack-mountable modular design. It offers 6-types of Racks (Frames) and 7 types of DPA-Modules to accommodate a wide range of power requirements.

The three MD-Frames; Classic DPA-25, Triple DPA-75, Upgrade DPA-150 can accommodate the four (4) MD-DPA-Modules types DPA 10 or 15 or 20 or 25 of: 10kVA/8kW - 15kVA/12kW - 20kVA/16kW - 25kVA/20kW power, whereas




The three MX-Frames; Classic DPA-50, Triple DPA-150, Upgrade DPA-250 can accommodate the three (3) MX-DPA-Modules types DPA 30 or 40 or 50 of: 30kVA/24kW - 40kVA/32kW - 45kVA/40kW power.


Key Features of CONCEPTPOWER DPA :

- Highest Availability
Modular, Decentralized Parallel Architecture (DPA) *Near-zero down time*
- High Power Density (up to 342kW / m²),
Small Footprint *Space-saving of expensive floor space*
- Unity Output Power Factor (KW=KVA)
Full power for loads with unity PF *No de-rating for loads with Unity PF*
- Blade-server-friendly power
Full power from 0.9 lead to 0.8 lag *No de-rating with leading PF loads*
- Highest Efficiency even with partial loads
Efficiency = 91 - 95.5% for loads 25-100%
(depending on Module power and type of load) *Energy cost saving during UPS-life-cycle*
- Very low input current distortion THDi
THDi = < 2 - 3% for loads of 100 – 25 % *Gen-set power and installation cost saving*




10.2 TECHNICAL CHARACTERISTICS


10.2.1 MECHANICAL CHARACTERISTICS MD-FRAMES AND MODULES

CONCEPTPOWER DPA		CLASSIC DPA-25	TRIPLE DPA-75	UPGRADE DPA-125
MD - FRAMES				
Configuration accommodates:	Max.	1 module (10-25kVA) and 200 x 7/9Ah batteries	3 modules (10-25kVA) and 180 x 7/9Ah batteries	5 modules (10-25kVA) and no batteries
Max. Power connection	kVA	25	75	125
Dimensions (WxHxD)	mm	550x1650x780	550x1975x780	550x1975x780
Weight of Empty Frame w/o modules and w/o batteries	kg	200	220	160
Weight of Frame with modules and w/o batteries	kg	224 up to 233 (with 1 Module)	292 up to 319 (with 3 Modules)	280 up to 325 (with 5 Modules)
Colours		Front : RAL 9007 + NEWAVE black (inlets) Side walls: Graffito grey		

MD- DPA MODULES		DPA 10	DPA 15	DPA 20	DPA 25
Output Apparent Rated Power	KVA	10	15	20	25
Output Active Rated Power	KW	8	12	16	20
Output Power with Load PF=1	KVA / KW	8 / 8	12 / 12	16 /16	20 /20
Variable Number of 12V Battery Blocks	No.	30 – 50	30 – 50	30 – 50	40-50
Dimensions (WxHxD)	mm	483 x 225 x 700			
Weight UPS Module	kg	24		33	
Colours		Front : RAL 9007			


10.2.2 MECHANICAL CHARACTERISTICS MX-FRAMES AND MODULES

CONCEPTPOWER DPA		CLASSIC DPA-50	TRIPLE DPA-150	UPGRADE DPA-250
MX - FRAMES				
Configuration accommodates:	Max.	1 module (30-45kVA) and 280 x 7/9Ah batteries	3 modules (30-45kVA) and 240x 7/9Ah batteries	5 modules (30-45kVA) and no batteries
Max. Power connection	kVA	50	150	250
Dimensions (WxHxD)	mm	730x1650x800	730x1975x800	730x1975x800
Weight of Empty Frame w/o modules and w/o batteries	kg	250	270	190
Weight of Frame with modules and w/o batteries	kg	300 up to 310 (with 1 Module)	420 up to 450 (with 3 Modules)	440 up to 490 (with 5 Modules)
Colours		Front : RAL 9007 + NEWAVE black (inlets) Sidewalls: Graffito grey		

MX- DPA MODULES		DPA 30	DPA 40	DPA 50
Output Apparent Rated Power	KVA	30	40	45 ¹⁾
Output Active Rated Power	KW	24	32	40
Output Power with Load PF=1	KVA / KW	24 / 24	32 / 32	40 /40
Variable Number of 12V Battery Blocks	No.	40-50	40-50	40-50
Dimensions (WxHxD)	mm	663 x 225 x 720		
Weight UPS Module	kg	50	57	60
Colours		Front : RAL 9007		
1) On Inverter mode 50 KVA/40kW on Bypass mode 45 KVA/40kW				

10.2.3 POWER SELECTION TABLE CONCEPTPOWER DPA MODULES

Conceptpower DPA: Power Modules DPA 10 - DPA 50

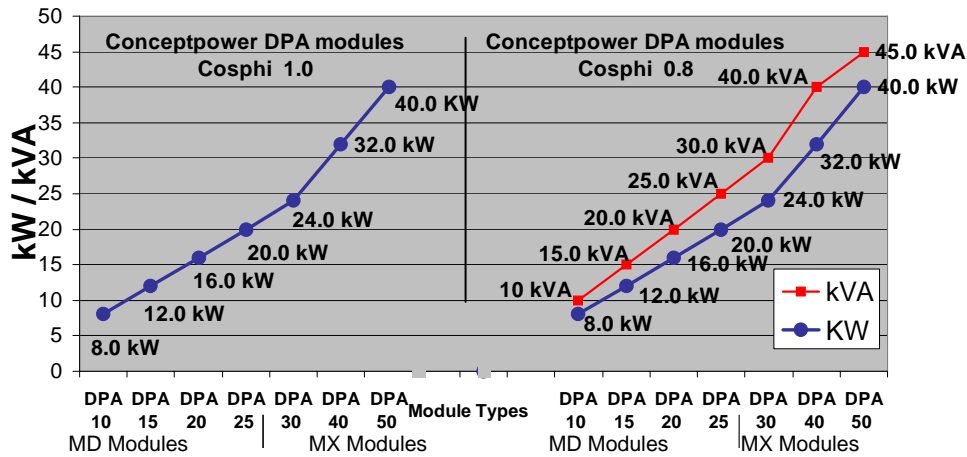


10.3 INPUT CHARACTERISTICS

Module Range	MD				MX			
	DPA 10	DPA 15	DPA 20	DPA 25	DPA 30	DPA 40	DPA 50	
Module Type								
Output Rated Power per Module $\cos\phi$ 0.8	kVA	10	15	20	25	30	40	45 ¹⁾
Output Rated Power per Module $\cos\phi$ 1.0	KW	8	12	16	20	24	32	40
Nominal Input Voltage	V	3x380/220V+N, 3x400V/230V+N, 3x415/240V+N						
Input Voltage Tolerance (ref to 3x400/230V) for Loads in %:	V	(-23%/+15%) 3x308/177 V to 3x460/264 V for <100 % load (-30%/+15%) 3x280/161 V to 3x460/264 V for < 80 % load (-40%/+15%) 3x240/138 V to 3x460/264 V for < 60 % load						
Input Frequency	Hz	35 – 70						
Input Power Factor		PF=0.99 @ 100 % load						
Inrush Current	A	limited by soft start / max. In						
Input Distortion THDI		Sine-wave THDi = < 2 % @ 100% load						
Max. Input Power with rated output power and charged battery per Module (output $\cos\phi$ = 1.0)	kW	8.5	12.8	17.0	21.3	25.4	33.9	42.9
Max. Input Current with rated output power and charged battery per Module (output $\cos\phi$ = 1.0)	A	12.3	18.5	24.7	30.8	36.8	49.1	62.1
Max. Input Power with rated output power and discharged battery per Module (output $\cos\phi$ = 1.0)	kW	9.3	14.0	18.6	23.3	27.8	37.1	46.9
Max. Input Current with rated output power and discharged battery per Module (output $\cos\phi$ = 1.0)	A	13.5	20.2	27.0	33.7	40.3	53.7	68.0

1) On Inverter mode 50 KVA/40kW on Bypass mode 45 KVA/40kW


10.3.1 GRAPH: INPUT PF VERSUS % LOAD

Input Power factor (Leading)

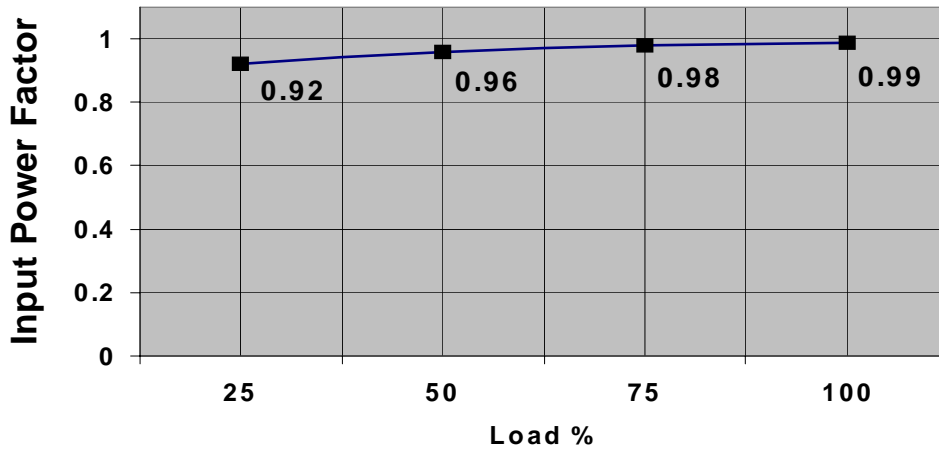

10.3.2 GRAPH: INPUT DISTORTION THDI VERSUS % LOAD

Input Current Distortion THDi

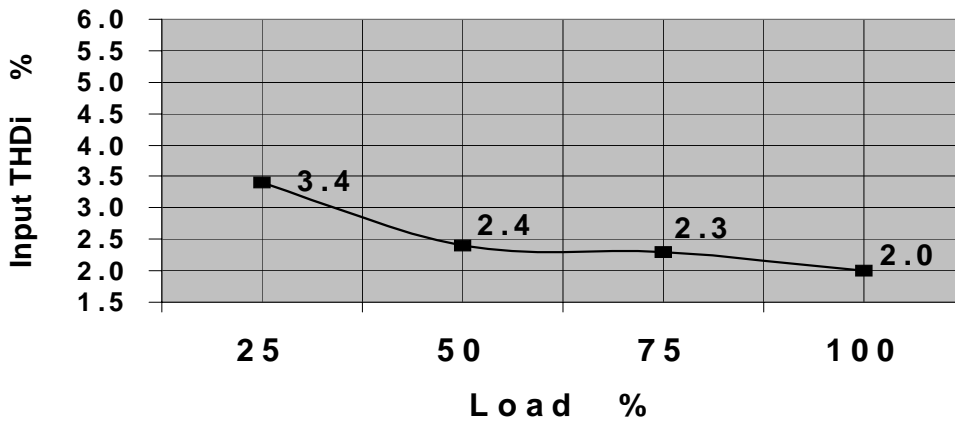

10.4 BATTERY CHARACTERISTICS

Module Range		MD				MX		
Module Type		DPA 10	DPA 15	DPA 20	DPA 25	DPA 30	DPA 40	DPA 50
Variable Number of 12V Battery Blocks	No.	30-50	30-50	30-50	40-50	40-50	40-50	40-50
Maximum Battery Charger Current	A	6A Standard (10 A optional)				10A Standard (15 A optional)		
Battery Charging Curve	Ripple free ; IU (DIN 41773)							
Temperature compensation	Standard (temp. sensor optional)							
Battery Test	Automatic and periodically (adjustable)							
Battery Type	Maintenance free VRLA or NiCd							


10.5 OUTPUT CHARACTERISTICS

Module Range		MD				MX		
Module Type		DPA 10	DPA 15	DPA 20	DPA 25	DPA 30	DPA 40	DPA 50
Output Rated Power per Module	kVA	10	15	20	25	30	40	45 ¹⁾
Output Rated Power per Module	KW	8	12	16	20	24	32	40
Output Current In @ cosphi 1.0 (400 V)	A	11.6	17.4	23.2	29	35	46.5	58
Output Rated Voltage	V	3x380/220V or 3x400/230V or 3x415/240V						
Output Voltage Stability	%	Static: Dynamic (Step load 0%-100% or 100%-0%)						< +/- 1% < +/- 4%
Output Voltage Distortion	%	With Linear Load With Non-linear Load (EN62040-3:2001)						< +/- 2% < +/- 4%
Output Frequency	Hz	50 Hz or 60 Hz						
Output Frequency Tolerance	%	Synchronized with mains (selectable for bypass operation) Free running						< +/- 2% or < +/- 4% +/- 0.1 %
Bypass operation		At Nominal Input voltage of 3x400 V or 190 V to 264 V ph-N						+/- 15 %
Permissible Unbalanced Load (All 3 phases regulated independently)	%	100%						
Phase Angle Tolerance (With 100 % Unbalanced load)	Deg.	+/- 0 deg.						
Overload Capability on Inverter	%	125 % load 150 % load						10 min. 60 sec.
Output short capability (RMS)	A	Inverter : Bypass :						2 x In during 250 ms 10 x In during 10 ms
Crest - Factor		3 : 1						

1) On Inverter mode 50 KVA/40kW on Bypass mode 45 KVA/40kW

10.5.1 GRAPH: AC – AC EFFICIENCY with Linier load @ cosphi 1

Efficiency up to 1 % higher with output PF cosphi 0.8
 Details refer to paragraph 10.7 Environmental Characteristics

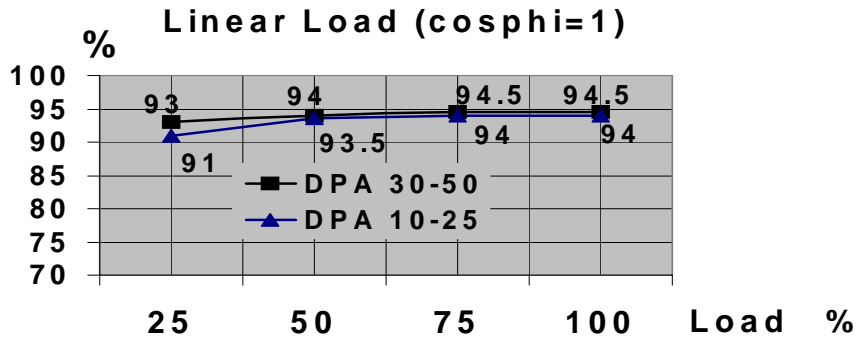

10.5.2 GRAPH: Output Power in KW and KVA VERSUS cosphi

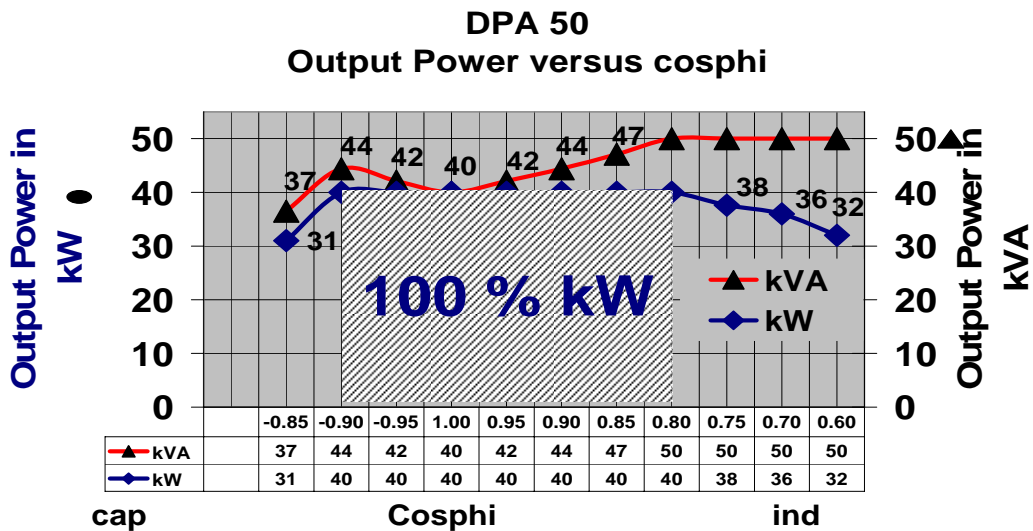


Fig. AC-AC Efficiency of DPA 50 Module

Cap.	cosφ	MD Module Range								MX Module Range					
		DPA10		DPA15		DPA20		DPA25		DPA30		DPA40		DPA50 ¹⁾	
		kW	kVA	kW	kVA	kW	kVA	kW	kVA	kW	kVA	kW	kVA	kW	kVA
Ind.	0.85	6.2	7.3	9.3	11	12.3	14.5	15.4	18.1	18.5	21.8	24.6	29	31	36.5
	0.90	8	8.9	12	13.3	16	17.8	20	22.2	24	26.7	32	35.6	40	44.4
	0.95	8	8.4	12	12.6	16	16.8	20	21.1	24	25.3	32	33.7	40	42.1
	1.00	8	8	12	12	16	16	20	20.0	24	24	32	32.0	40	40
	0.95	8	8.4	12	12.6	16	16.8	20	21.1	24	25.3	32	33.7	40	42.1
	0.90	8	8.9	12	13.3	16	17.8	20	22.2	24	26.7	32	35.6	40	44.4
	0.85	8	9.4	12	14.1	16	18.8	20	23.5	24	28.2	32	37.6	40	47.1
	0.80	8	10	12	15	16	20	20	25	24	30	32	40	40	50 ¹⁾
	0.75	7.6	10	11.4	15	15.3	20	19.1	25	22.9	30	30.5	40	38	50 ¹⁾
	0.70	7.2	10	10.8	15	14.5	20	18.1	25	21.7	30	28.9	40	36	50 ¹⁾
0.60	6.3	10	9.5	15	12.7	20	15.9	25	19	30	25.4	40	32	50 ¹⁾	

1) DPA 50 : On Inverter Mode 50 KVA/40kW on Bypass Mode 45 KVA/40kW

Changes of this table without notice – modifications reserved

10.6 ENVIRONMENTAL CHARACTERISTICS

Module Range		MD				MX		
Module Type		DPA 10	DPA 15	DPA 20	DPA 25	DPA 30	DPA 40	DPA 50
Audible Noise with 100% / 50% Load	dBA	55/49	57/49	57/49	57/49	59/51	65/55	65/55
Operation temperature	°C	0 – 40						
Ambient Temperature for Batteries (recommended)	°C	20 – 25						
Storage Temperature	°C	-25 - +70						
Battery Storage Time at Ambient Temperature		Max. 6 months						
Max. altitude (above sea level)	m	1000m (3300ft) without de-rating						
De-rating factor for use at altitudes above 1000m sea level according (IEC 62040-3)		Meter above sea level (m / ft)				De-Rating Factor for Power		
		1500 / 4850				0.95		
		2000 / 6600				0.91		
		2500 / 8250				0.86		
		3000 / 9900				0.82		
Relative Air-humidity		Max. 95% (non-condensing)						
Accessibility		Totally front accessibility for service and maintenance (no need for side, top or rear access)						
Positioning		Min. 20 cm rear space (required for fan)						
Input and Output Power Cabling		From the bottom on the front						
Efficiency AC-AC up to (at cosphi 1.0) (depending on Module power)	%	<i>Load</i>	100 %	75 %	50%	25%		
		DPA 30-50 :	94.5%	94.5%	94%	93%		
		DPA 10-25 :	94%	94%	93.5%	91%		
Efficiency with Linear Load at cosφ =0.8ind Efficiency Non-linear Load (EN 62040-1-1:2003)		Typically up to 1 % higher of above values Typically up to 1 % lower of above values						
Eco-Mode efficiency at 100% load	%	98 %						

10.7 STANDARDS

Safety	EN 62040-1-1:2003, EN 60950-1:2001/A11:2004						
Electromagnetic Compatibility	EN 62040-2:2005, EN61000-3-2:2000, EN6100-3-3:1995/A1:2001, EN61000-6-2:2001, EN61000-6-4:2001						
EMC Classes C2 domestic or industrial In < 16A C3 industrial In >16A	Classic DPA-25 C2, (C3)	Triple DPA-75 C2, (C3)	Upgrade DPA-125 C2, (C3)	Classic DPA-50 C2, (C3)	Triple DPA-150 C2, (C3)	Upgrade DPA-250 C2, (C3)	
Performance	EN62040-3:2001						
Product certification	CE						
Degree of protection	IP 20						

10.8 COMMUNICATION

Power Management Display (PMD)	1 LCD display for each module
Serial ports RS232 on Sub-D9	2x system frame + 1x on each module (Smart Port) For monitoring and integration in network management
USB	1x For monitoring and software management
Customer Interfaces : Inputs DRY PORT X1	1 Remote Shut down [EMERGENCY OFF (Normally closed)] 1 GEN-ON (Normally open) 2 Programmable Customer's Inputs (Normally open) 1 Temp. Sensor for Battery Control
Customer Interfaces : Outputs DRY PORT X2 , X3, X4	10 voltage free contacts For remote signalling and automatic computer shutdown
Slot for SNMP	SNMP card (optional) For monitoring and integration in network management
Slot for Newavewatch™	Newavewatch™ card (optional) for Premium Power Protection

10.8.1 POWER MANAGEMENT DISPLAY (PMD)


The user-friendly PMD consists of three parts the MIMIC DIAGRAM, CONTROL KEYS and LCD that provides the necessary monitoring information about the UPS.

10.8.2 MIMIC DIAGRAM

The mimic diagram serves to give the general status of the UPS. The LED-indicators show the power flow status and in the event of mains failure or load transfer from inverter to bypass and vice-versa the corresponding LED-indicators will change colour from green (normal) to red (warning). The LED's LINE 1 (rectifier) and LINE 2 (bypass) indicate the availability of the mains power supply. The LED's INVERTER and BYPASS if green indicate which of the two are supplying power to the critical load. When the LED-indicator BATTERY is lit it means that the battery due to mains failure is supplying the load. The LED-indicator ALARM is a visual indication of any internal or external alarm condition. At the same time the audible alarm will be activated.

10.8.3 DISPLAY

The 2 x 20 character LCD simplifies the communication with the UPS. The menu driven LCD enables the access to the EVENT REGISTER, or to monitor the input and output U, I, f, P, Autonomy Time and other Measurement's, to perform commands like start-up and shut-down of INVERTER or load transfer from INVERTER to BYPASS and vice-versa and finally it serves for the DIAGNOSIS (SERVICE MODE) for adjustments and testing (for more details see the USER MANUAL of Conceptpower DPA™).

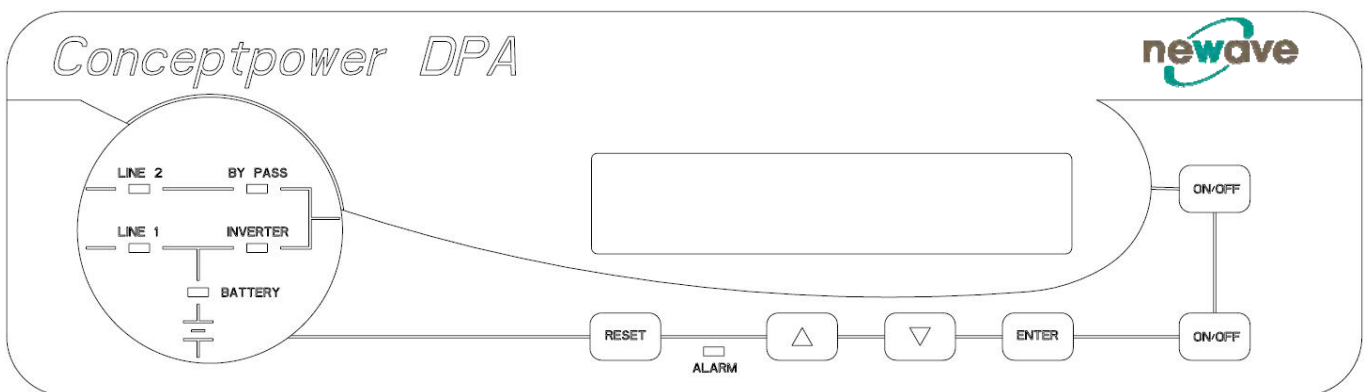

Power Management Display (PMD) of Conceptpower DPM™

10.8.4 CUSTOMER INTERFACES (Terminals X1...X4)

10.8.5 CUSTOMER INPUTS DRY PORT s: Terminal block X1

Connection of Remote Shut down facilities, Generator Operation, Customers specials
(see UM Section 9 / OPTIONS)

10.8.6 CUSTOMER OUTPUTS DRY PORTs : Terminal blocks X2, X3, X4

Provision of signals for the automatic and orderly shutdown of servers, AS400 or Automation building systems

All voltage free contacts are rated 60 VAC max. and 500 mA max.:

All the interfaces are connected to Phoenix Spring terminals with wires : 0.5 mm²

Block	Terminal	Contact	Signal	On Display	Function
X1	X1 / 1		+ 3.3 Vdc		Remote Shut down
	X1 / 2		GND		(Do not remove the factory mounted bridge until external Remote Shut down is connected)
	X1 / 3		+ 3.3 Vdc		Generator Operation
	X1 / 4		GND		(NC = Generator ON)
	X1 / 5		+ 3.3 Vdc		Customer IN 1
	X1 / 6		GND		(Function on request, to be defined)
	X1 / 7		+ 3.3 Vdc		Customer IN 2
	X1 / 8		GND		(Function on request, to be defined)
	X1 / 9		+ 3.3 Vdc		Temperature Battery
	X1 / 10		GND		(If connected , the battery charger current if depending of the battery temp.)
X2	X2 / 1			MAINS_OK	Mains Present
	X2 / 2		ALARM		Mains Failure
	X2 / 3				Common
	X2 / 4			LOAD_ON_INV	Load on Inverter
	X2 / 5		Message		(Load on Mains bypass)
	X2 / 6				Common
	X2 / 7			BATT_LOW	Battery Low
	X2 / 8		ALARM		Battery OK
	X2 / 9				Common
	X2 / 10		Message		LOAD_ON_MAINS Load on bypass (Mains)
X3	X3 / 1		Message		(Load on Inverter)
	X3 / 2				Common
	X3 / 3			COMMON_ALARM	Common Alarm (System)
	X3 / 4		ALARM		NO Alarm Condition
	X3 / 5				Common
	X3 / 6			MODUL_ALARM1	Module 1 Alarm
	X3 / 7		ALARM		NO Alarm Condition
	X3 / 8				Common
	X3 / 9			MODUL_ALARM2	Module 2 Alarm
	X3 / 10		ALARM		NO Alarm Condition
X4	X4 / 1				Common
	X4 / 2			MODUL_ALARM3	Module 3 Alarm
	X4 / 3		ALARM		NO Alarm Condition
	X4 / 4				Common
	X4 / 5			MODUL_ALARM4	Module 4 Alarm
	X4 / 6		ALARM		NO Alarm Condition
	X4 / 7				Common
	X4 / 8			MODUL_ALARM5	Module 5 Alarm
	X4 / 9		ALARM		NO Alarm Condition
	X4 / 10				Common

Phoenix Spring Terminals (X1...X4) Connection

10.9 OPTIONS

- Modem/Ethernet card or Modem/GSM card for Newavewatch™ Management Software
- SNMP card and WaveMon Management Software , Modbus Protocol
- External Battery Cabinets
- Parallel bus for additional frames
- In/output Transformator for special voltages
- Battery Chargers
- Temp. sensor for battery temp. control

10.9.1 MODEM/ETHERNET CARD / Newavewatch™ MANAGEMENT SOFTWARE

Newavewatch™ is a redundant remote monitoring and management service which is a part of the Premium Power Protection Concept, providing you with peace-of-mind protection, knowing the mission critical facility is under careful, continuous watch 24/7/365. There are two different solution cards Modem/Ethernet or Modem/GSM to connect the UPS to the outside world.

Continuous monitoring is an affordable insurance policy to detect and warn before they become a crisis. **Acquire key performance parameter** and productivity information in real-time to empower you with the details needed to better understand machine performance and faster troubleshoot downtime events. **Early warning system**, so problems can be addressed before they become a real threat to the load. **Professional experts**, your virtual service technician onsite. **Total transparency** of information and actions performed like Notification of all critical status changes, Coordination of equipment service, Reporting of all alarms with priorities.

What are the features?


- Redundant and secure communication
- Alarm acknowledgment
- Priority driven Management (with escalation)

Comprehensive Management System

- Reception and management of alarm calls from UPS
- Storage of UPS Data in a database exportable in a CVS-format for easy handling in Excel
- Unlimited number of UPS that can be managed
- User administration with passwords and permission-level
- Administration of Log file
- Data logging with statistical analysis and diagnostics, report


Visualization of the UPS data:

- Current status (“single” and “parallel” operation)
- Measured values for single or three phase
- Recording function including graphs with zooming capabilities for selected measured values
- Display of event log file
- Display of UPS Parameters
- Web Server functionality, for data access from any Web Browser


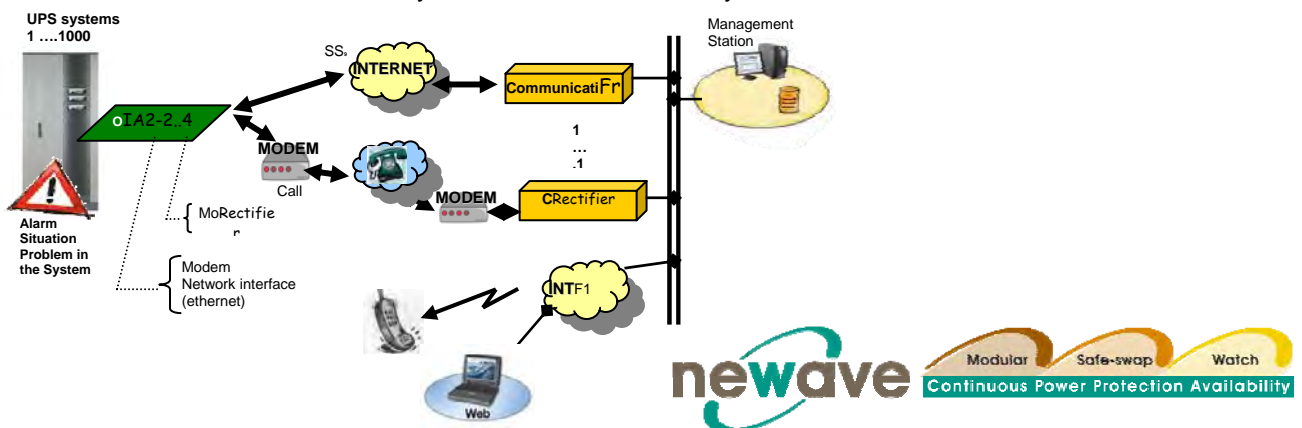


10.9.2 SNMP card / WaveMon Management Software

The Simple Network Management Protocol (SNMP) is a worldwide-standardized communication-protocol. It is used to monitor any device in the network via simple control language. The UPS-Management Software WaveMon also provides its data in this SNMP format with its internal software agent. The operating system you are using must support the SNMP protocol. We offer our WaveMon software with SNMP functionality for Novell, OS/2, all Windows running on INTEL and ALPHA, DEC VMS, Apple. Two types of SNMP interfaces with identical functionality are available: an external SNMP-Adapter (Box) and an internal SNMP-Card. Both can manage a parallel system (N modules) and return either global values - which are consistent for the whole parallel system - or specific values from the single modules.

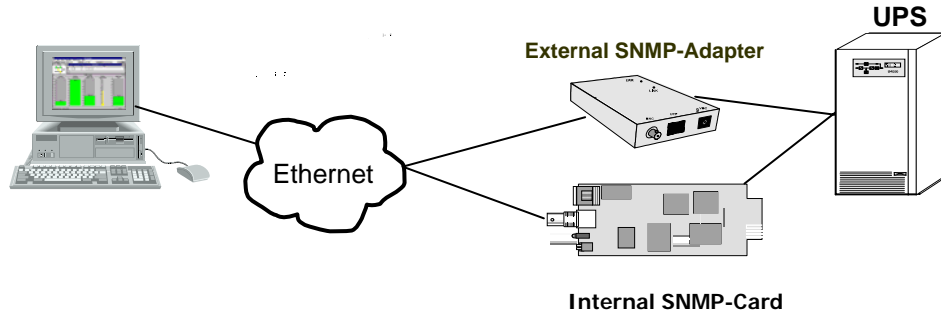

10.9.3 BATTERY CABINETS

S-type = For Separate. Battery C-type = For Common. Battery		CBAT-DPA-120 S-type = item no. 00-7912 C-type = item no. 00-7964	CBAT-DPA-200 S-type = item no. 00-7913 C-type = item no. 00-7965																																						
BATTERY FRAMES																																									
Configuration accommodates:	Max.	120 Batt. block x 24Ah/28Ah on 8 shelf 3x5=15 blocks/shelf	200 Batt. blocks x 24Ah/28Ah on 7 shelf 6x5=30 blocks/shelf																																						
Battery fuses / Max. Batt. Strings : Terminals :	S-type	3 / 3 (Terminal 9 x 16/25mm ²)	5 / 5 (Terminal 15 x 16/25mm ²)																																						
Battery fuses / Max. Batt. Strings Terminals :	C-type	3 / 3 + Com. Connection Bar 3 x (2xM8) +PE 2xM8	5 / 5 + Com. Connection Bar 3 x (2xM10) +PE 2xM10																																						
Fuse Type (Very Fast acting)	A	3x100 A	5x100A																																						
Dimensions (WxHxD)	mm	730x1975x800	1200x1975x800																																						
Weight w/o trays and w/o batteries	kg	150	250																																						
Battery configuration within Cabinets		<table border="0"> <tr><td>Item no</td><td>Batt. Config.</td></tr> <tr><td>00-7966</td><td>30x28Ah</td></tr> <tr><td>00-7969</td><td>40x28Ah</td></tr> <tr><td>00-7970</td><td>50x28Ah</td></tr> <tr><td>00-7971</td><td>(2x30)x28Ah</td></tr> <tr><td>00-7972</td><td>(2x40)x28Ah</td></tr> <tr><td>00-7973</td><td>(2x50)x28Ah</td></tr> <tr><td>00-7974</td><td>(3x30)x28Ah</td></tr> <tr><td>00-7975</td><td>(3x40)x28Ah</td></tr> </table>	Item no	Batt. Config.	00-7966	30x28Ah	00-7969	40x28Ah	00-7970	50x28Ah	00-7971	(2x30)x28Ah	00-7972	(2x40)x28Ah	00-7973	(2x50)x28Ah	00-7974	(3x30)x28Ah	00-7975	(3x40)x28Ah	<table border="0"> <tr><td>Item no</td><td>Batt. Config</td></tr> <tr><td>00-8486</td><td>(2x40)x28Ah</td></tr> <tr><td>00-8487</td><td>(3x40)x28Ah</td></tr> <tr><td>00-7978</td><td>(4x40)x28Ah</td></tr> <tr><td>00-7981</td><td>(5x40)x28Ah</td></tr> <tr><td>00-8488</td><td>(2x50)x28Ah</td></tr> <tr><td>00-7977</td><td>(3x50)x28Ah</td></tr> <tr><td>00-7979</td><td>(4x50)x28Ah</td></tr> <tr><td>00-7980</td><td>(5x30)x28Ah</td></tr> <tr><td>00-7981</td><td>(5x40)x28Ah</td></tr> </table>	Item no	Batt. Config	00-8486	(2x40)x28Ah	00-8487	(3x40)x28Ah	00-7978	(4x40)x28Ah	00-7981	(5x40)x28Ah	00-8488	(2x50)x28Ah	00-7977	(3x50)x28Ah	00-7979	(4x50)x28Ah	00-7980	(5x30)x28Ah	00-7981	(5x40)x28Ah
Item no	Batt. Config.																																								
00-7966	30x28Ah																																								
00-7969	40x28Ah																																								
00-7970	50x28Ah																																								
00-7971	(2x30)x28Ah																																								
00-7972	(2x40)x28Ah																																								
00-7973	(2x50)x28Ah																																								
00-7974	(3x30)x28Ah																																								
00-7975	(3x40)x28Ah																																								
Item no	Batt. Config																																								
00-8486	(2x40)x28Ah																																								
00-8487	(3x40)x28Ah																																								
00-7978	(4x40)x28Ah																																								
00-7981	(5x40)x28Ah																																								
00-8488	(2x50)x28Ah																																								
00-7977	(3x50)x28Ah																																								
00-7979	(4x50)x28Ah																																								
00-7980	(5x30)x28Ah																																								
00-7981	(5x40)x28Ah																																								

10.10 BATTERY AUTONOMIES
10.10.1 MD Modules: Examples of Internal Battery Autonomy

Module Type		DPA 10	DPA 15	DPA 20	DPA 25
Separate Battery configuration		Battery Autonomy in (min.) per Module			
Frame Type	Battery / Module (up to 3 modules / within Triple-75 frame)	10kVA/8KW	15kVA/12KW	20KVA/16KW	25KVA/20KW
CLASSIC DPA-25 or TRIPLE DPA-75	40x7Ah / 9Ah	8 / 14	5 / 8		
CLASSIC DPA-25 or TRIPLE DPA-75	50x7Ah / 9Ah	11 / 18	7 / 11		
CLASSIC DPA-25 or TRIPLE DPA-75	(2x30)x7Ah / 9Ah	14 / 23	10 / 14	6 / 9	
Common Battery configuration		Battery Autonomy in (min.) for Tot. System Power			
With 1 Module	Module Type	1 x DPA 10	1 x DPA 15	1 x DPA 20	1 x DPA 25
	Total System Power	10kVA/8KW	15kVA/12KW	20KVA/16KW	25KVA/20KW
CLASSIC DPA-25 or TRIPLE DPA-75	(2x40)x7Ah / 9Ah	21 / 33	12 / 20	10 / 14	6 / 10
CLASSIC DPA-25 or TRIPLE DPA-75	(2x50)x7Ah / 9Ah	28 / 43	16 / 26	11 / 18	8 / 14
CLASSIC DPA-25 or TRIPLE DPA-75	(3x40)x7Ah / 9Ah	35 / 54	21 / 33	15 / 23	12 / 23
CLASSIC DPA-25 or TRIPLE DPA-75	(3x50)x7Ah / 9Ah	47 / 1h 12'	28 / 43	19 / 30	14 / 23
ONLY for CLASSIC DPA-25	(4x50)x7Ah / 9Ah	1h 09' / 1h 44'	41 / 1h 02'	28 / 43	21 / 33
With 2 Module	Module Type	2 x DPA 10	2 x DPA 15	2 x DPA 20	2 x DPA 25
	Total System Power	20kVA/16KW	30kVA/24KW	40kVA/32KW	50kVA/40KW
TRIPLE DPA-75	(2x40)x7Ah / 9Ah	8 / 14	5 / 8		
TRIPLE DPA-75	(2x50)x7Ah / 9Ah	11 / 18	7 / 11		
TRIPLE DPA-75	(3x40)x7Ah / 9Ah	14 / 23	10 / 14	6 / 9	
TRIPLE DPA-75	(3x50)x9Ah	30	18	13	9
With 3 Module	Module Type	3 x DPA 10	3 x DPA 15	3 x DPA 20	3 x DPA 25
	Total System Power	30kVA/24KW	45kVA/36KW	60kVA/48KW	75kVA/60KW
TRIPLE DPA-75	(2x40)x7Ah / 9Ah	5 / 8			
TRIPLE DPA-75	(2x50)x7Ah / 9Ah	7 / 11			
TRIPLE DPA-75	(3x40)x7Ah / 9Ah	8 / 14	5 / 8		
TRIPLE DPA-75	(3x50)x9Ah	18	11	8	6

10.10.2 MD Modules: Examples of External Battery Autonomy

This configuration are mostly used in combination with the frame UPGRADE DPA-125

Module Type		DPA 10	DPA 15	DPA 20	DPA 25
Separate Battery configuration		Battery Autonomy in (min.) per Module			
Battery Cabinet (for up to 5 modules linked)	Battery / Module	10kVA/8KW	15kVA/12KW	20KVA/16KW	25KVA/20KW
1x CBAT-DPA-200	30x28Ah	35	22	15	
1x CBAT-DPA-200	40x28Ah	55	32	22	17
Common Battery configuration		Battery Autonomy in (min.) for Tot. System Power (4+1)			
	Module Type	4 x DPA 10	4 x DPA 15	4 x DPA 20	4 x DPA 25
Battery Cabinet	Total System Power	40kVA/32KW	60kVA/48KW	80kVA/64KW	100kVA/80KW
1x CBAT-DPA-120	40x28Ah	9	5		
1x CBAT-DPA-120	(2x40)x28Ah	22	13	9	7
1x CBAT-DPA-120	(3x40)x28Ah	37	22	15	12
1x CBAT-DPA-200	(4x40)x28Ah	54	32	22	17
1x CBAT-DPA-200	(4x50)x28Ah	72	43	30	22

10.10.3 MX Modules: Examples of Internal Battery Autonomy

<i>Module Type</i>		<i>DPA 30</i>	<i>DPA 40</i>	<i>DPA 50</i>
Separate Battery configuration		Battery Autonomy in (min.) per Module		
Frame Type	Battery / Module (up to 3 modules / within Triple-150 frame)	30kVA/24KW	40kVA/32KW	45kVA/40KW
CLASSIC DPA-50 or TRIPLE DPA-150	(2x40)x9Ah	8	6	
Common Battery configuration		Battery Autonomy in (min.) for Tot. System Power		
<i>With 1 Module</i>	<i>Module Type</i>	1 x DPA 30	1 x DPA 40	1 x DPA 50
	<i>Total System Power</i>	30kVA/24KW	40kVA/32KW	45kVA/40KW
CLASSIC DPA-50	(2x50)x9Ah	11	7	6
CLASSIC DPA-50	(3x40)x9Ah	14	9	7
CLASSIC DPA-50	(3x50)x9Ah	18	13	9
CLASSIC DPA-50	(4x50)x9Ah	26	18	14
CLASSIC DPA-50	(5x50)x9Ah	34	24	18
<i>With 2 Module</i>	<i>Module Type</i>	2 x DPA 30	2 x DPA 40	2 x DPA 50
	<i>Total System Power</i>	60kVA/48KW	80kVA/64KW	90kVA/80KW
TRIPLE DPA-150	2x(2x40)x9Ah	8	6	
TRIPLE DPA-150	3x(2x40)x9Ah	14	9	7
<i>With 3 Module</i>	<i>Module Type</i>	3 x DPA 30	3 x DPA 40	3 x DPA 50
	<i>Total System Power</i>	90kVA/72KW	120kVA/96KW	135kVA/120KW
TRIPLE DPA-150	3x(2x40)x9Ah	8	6	

10.10.4 MX Modules : Examples of External Battery Autonomy

This configuration are mostly used in combination with the frame UPGRADE DPA-250

<i>Module Type</i>		<i>DPA 30</i>	<i>DPA 40</i>	<i>DPA 50</i>
Separate Battery configuration		Battery Autonomy in (min.) per Module		
<i>Battery Cabinet</i> (for up to 5 modules linked)	Battery / Module	30kVA/24KW	40kVA/32KW	45kVA/40KW
1x CBAT-DPA-200	40x28Ah	13	9	7
Common Battery configuration		Battery Autonomy in (min.) for Tot. System Power (4+1)		
<i>With 4 Module</i>	<i>Module Type</i>	4 x DPA 30	4 x DPA 40	4 x DPA 50
	<i>Total System Power</i>	120kVA/96KW	160kVA/128KW	180kVA/160KW
1x CBAT-DPA-120	(3x40)x28Ah	9	6	
1x CBAT-DPA-200	(4x40)x28Ah	13	9	7
1x CBAT-DPA-200	(5X40)x28Ah	18	12	11

10.11 INSTALLATION PLANNING

Clearances	X	Y
Minimum	200mm	900 mm

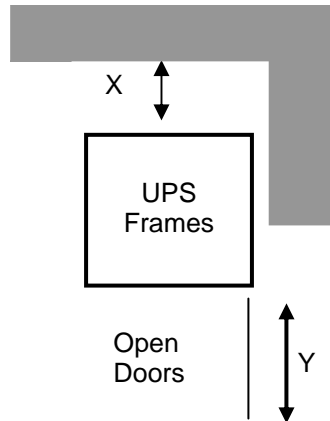


Figure 1: UPS space recommendation

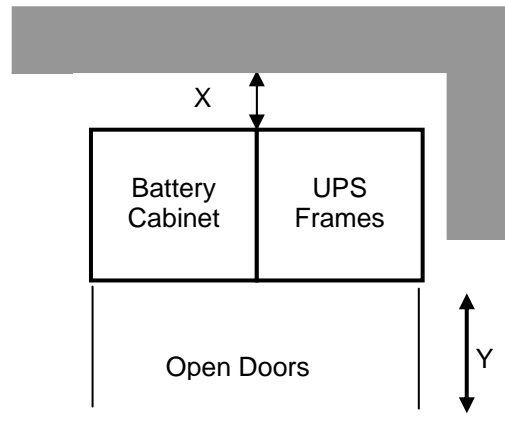


Figure 2 : : UPS + Battery space recommendation

UPS Frame type (25kVA up to 125 kVA)	CLASSIC DPA-25	TRIPLE DPA-75	UPGRADE DPA-125
Dimensions (WxHxD) mm	550x1650x780	550x1975x780	550x1975x780
UPS Frame type (50kVA up to 250 kVA)	CLASSIC DPA-50	TRIPLE DPA-150	UPGRADE DPA-250
Dimensions (WxHxD) mm	730x1650x800	730x1975x780	730x1975x800
Battery Cabinet Type	NA	CBAT DPA-120	CBAT DPA-200
Dimensions (WxHxD) mm	NA	730x1975x800	1200x1975x800
Accessibility	Totally front accessibility for service and maintenance (no need for side, top or rear access)		
Positioning	Min. 20 cm rear space (required for fan)		
Input and Output Power Cabling	From the bottom on the front		

10.11.1 HEAT DISSIPATION PER MODULE WITH NON-LINEAR LOAD

Module size		MD				MX		
		DPA 10	DPA 15	DPA 20	DPA 25	DPA 30	DPA 40	DPA 50
Heat Dissipation with 100% Non-linear Load per Module (EN 62040-1-1:2003)	W	600	900	1200	1500	1670	2225	2780
Heat Dissipation with 100% Non-linear Load per Module (EN 62040-1-1:2003)	BTU	2047	3070	4094	5118	5698	7592	9485
Airflow (25° - 30°C) with Non-linear Load per Module (EN 62040-1-1:2003)	m ³ /h	150	150	150	150	380	380	380


10.12 WIRING AND BLOCK DIAGRAMS FOR ALL FRAMES AND MODULES

The customer has to supply the wiring to connect the UPS to the local power source. The installation inspection and initial start up of the UPS and extra battery cabinet must be carried out by a qualified service personnel such as a licensed service engineer from the manufacturer or from an agent authorised by the manufacturer. More details and procedure are mentioned in the user manual.


10.12.1 TERMINAL CONNECTIONS OVERVIEW

FRAME TYPE Terminals (T) Connection Bar (B)	Separate. Battery (+ / N / -) +PE	Common Battery (+ / N / -) +PE	Input Bypass 3+N	Input Rectifier 3+N+PE	Output load 3+N+PE
CLASSIC DPA-25	3+1 x 16/25mm ² (T)	3+1 x 16/25mm ² (T)	4 x 10/16mm ² (T)	5 x 10/16mm ² (T)	5 x 10/16mm ² (T)
TRIPLE DPA-75	9+1 x 16/25mm ² (T)	3 x M6 (B) +PE 1 x 16mm ² (T)	4 x 35/50mm ² (T)	4 x 35/50mm ² (T) +PE 50 mm ² (T)	4 x 35/50mm ² (T) +PE 50 mm ² (T)
UPGRADE DPA-125	15+1 x 16/25mm ² (T)	3 x M10 (B) +PE 1 x 50mm ² (T)	4 x 70/95mm ² (T)	4 x 70/95mm ² (T) + PE 50mm ² (T)	4 x 70/95mm ² (T) + PE 50mm ² (T)
CLASSIC DPA-50	3+1 x 16/25mm ² (T)	3+1 x 16/25mm ² (T)	4 x 16/25mm ² (T)	5 x 16/25mm ² (T)	5 x 16/25mm ² (T)
TRIPLE DPA-150	9+1 x 16/25mm ² (T) +PE 1xM10 (B)	3 x M10 (B) +PE 1xM10 (B)	3 x M10(B) +PE 1xM10 (B)	4 x M10 (B) +PE 1xM10 (B)	4 x M10 (B) +PE 1xM10 (B)
UPGRADE DPA-250	15 x 16/25mm ² (T) +PE 1xM12 (B)	3 x M12 (B) +PE 1xM12 (B)	3 x M12 (B) +PE 1xM12 (B)	4 x M12 (B) +PE 1xM12 (B)	4 x M12 (B) +PE 1xM12 (B)

CLASSIC DPA-25

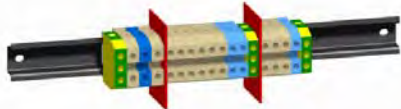

CLASSIC DPA-50

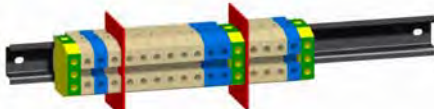


TRIPLE DPA-75





TRIPLE DPA-150



Upgrade DPA-125

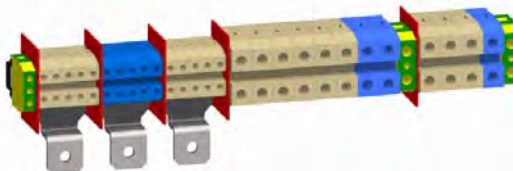

UPGRADE DPA-250

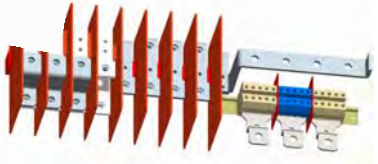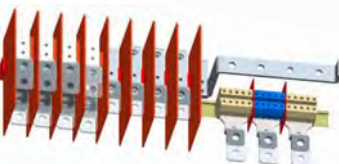


Dual feed input

Single feed input

10.12.2 SINGLE FEED INPUT

Cable Sections and Fuse Ratings recommended. Alternatively, local standards to be respected

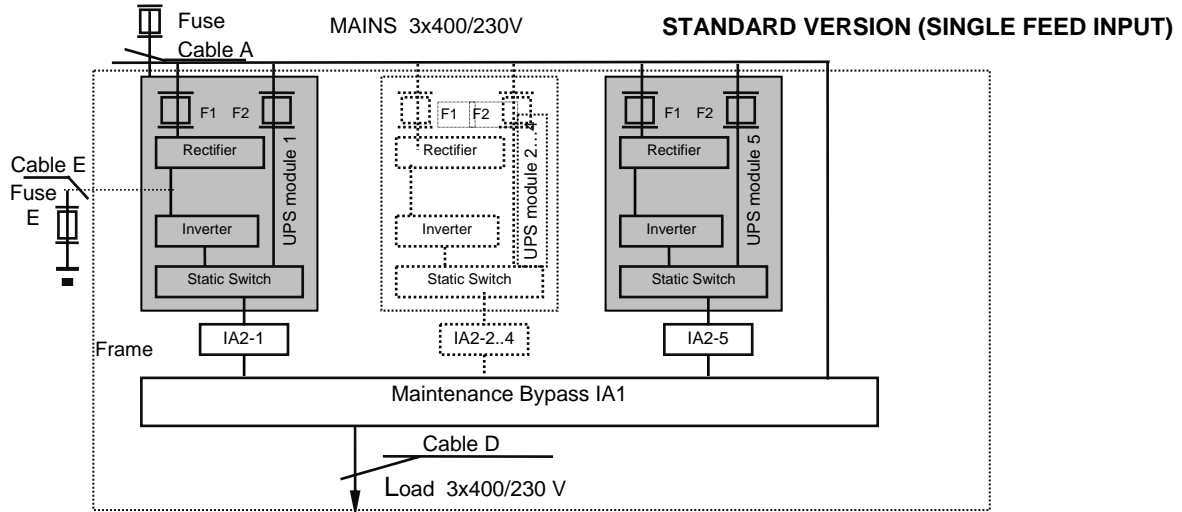


Frame type	Load kVA cosphi 0.8	Input 3x400V			Output 3x400V cosphi 0.8			Battery	
		Fuse A (Agl/CB)	Cable A (mm ²) (IEC 60950-1:2001)	Max. Input Current with battery charging (A)	Cable D (mm ²) (IEC 60950-1:2001)	I nom (A)	Fuse E + / N / - (Agl/CB)	Com. Battery	Sep. Battery
MD Frames									
CLASSIC DPA-25	25	3x63A	5x10	34	5x10	36	3x63A*1	3x10	3x10
TRIPLE DPA-75	75	3x125A	5x50	101	5x50	108	3x160A*1	3x50	3x (3x10)
UPGRADE DPA-125	125	3x225A	5x95	169	5x95	181	3x260A*1	3x120	5x (3x10)
MX Frames									
CLASSIC DPA 50	50	3x100A	5x25	67	5x25	72	3x100A*1	3x25	3x25
TRIPLE DPA-150	150	3x250A	5x120 or 5x(2x50)	202	5x120 or 5x(2x50)	218	3x300A*1	3x150	3x (3x25)
UPGRADE DPA-250	250	3x400A	5x(2x95)	337	5x(2x95)	362	3x500A*1	3x(2x150)	5x (3x25)

*1 only valid for common battery use

10.12.3 DUAL FEED INPUT

Cable Sections and Fuse Ratings recommended. Alternatively, local standards to be respected

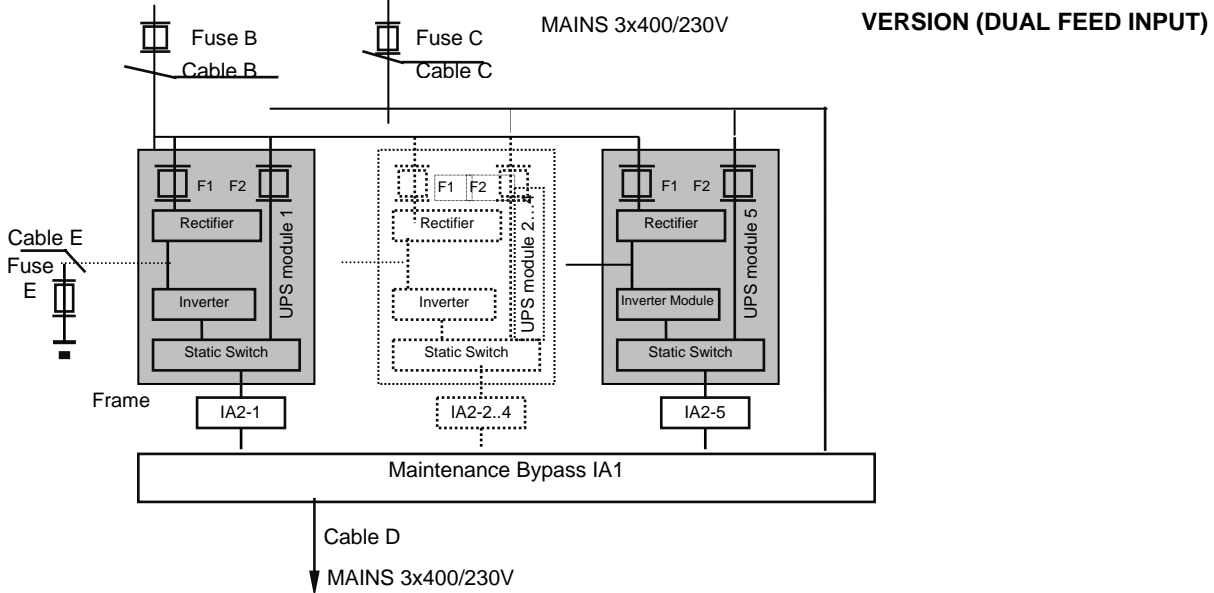

Frame type	Load kVA cosphi 0.8	Input 3x400V			Bypass 3x400V		Output 3x400V cosphi 0.8		Battery		
		Fuse B (Agl/CB)	Cable B (mm ²) (IEC 60950-1:2001)	Max. Input Current with battery charging (A)	Fuse C (Agl/CB)	Cable C (mm ²) (IEC 60950-1:2001)	Cable D (mm ²) (IEC 60950-1:2001)	I nom	Fuse E +/N/- (Agl/CB)	Cable E (mm ²) for CBAT DPA 120 or 200 ONLY + / N / -	
										Com. Battery	Sep. Battery
MD Frames											
CLASSIC DPA-25	25	3x63A	5x10	34	3x63A	4x10	5x10	36 A	3x63A*1	3x10	3x10
TRIPLE DPA-75	75	3x125A	5x50	101	3x125A	4x50	5x50	108 A	3x160A*1	3x50	3x (3x10)
UPGRADE DPA-125	125	3x225A	5x95	169	3x225A	4x95	5x95	181 A	3x260A*1	3x120	5x (3x10)
MX Frames											
CLASSIC DPA 50	50	3x100A	5x25	67	3x100A	4x25	5x25	72 A	3x100A*1	3x25	3x25
TRIPLE DPA-150	150	3x250A	5x120 or 5x(2x50)	202	3x250A	4x120 or 4x(2x50)	5x120 or 5x(2x50)	218 A	3x300A*1	3x150	3x (3x25)
UPGRADE DPA-250	250	3x400A	5x(2x95)	337	3x400A	4x(2x95)	5x(2x95)	362 A	3x500A*1	3x(2x150)	5x (3x25)

*1 only valid for common battery use