



ИБП Riello Sentinel Pro (SEP) - технические спецификации. Юниджет

Постоянная ссылка на страницу: <https://www.uni-jet.com/catalog/istochniki-besperebojnogo-pitaniya/on-line-ibp-1-kva-10kva/riello-sentinel-pro.html>



Technical Specifications

Sentinel PRO

700 VA up to 3000 VA

1000 VA ER-2200 VA ER-3300 VA ER



CONTENTS

1.	GENERAL DESCRIPTION	2
1.1.	<i>Main features of the UPS unit</i>	3
1.2.	<i>Standard Versions</i>	3
1.3.	<i>ER Versions for extended autonomy</i>	3
2.	SENTINEL PRO SERIES UPS AESTHETICS	4
2.1.	<i>SENTINEL PRO front panel</i>	4
2.2.	<i>SENTINEL PRO rear panel</i>	5
2.3.	<i>Battery Box front panel</i>	6
2.4.	<i>Battery Box rear panel</i>	6
2.5.	<i>BBox T12 rear panel</i>	7
3.	TECHNICAL DATA TABLE	8
3.1.	<i>SENTINEL PRO UPS</i>	8
3.2.	<i>T10 Battery Box</i>	11
3.3.	<i>T12 Battery Box</i>	11
4.	BLOCK DIAGRAM	12
5.	COMMUNICATION PORTS AND FIRMWARE	13
5.1.	<i>Examples for connecting signals through the RS232 port</i>	13
5.2.	<i>Technical data for “pin 6” power through the RS232 port</i>	14
5.3.	<i>Firmware</i>	14
5.4.	<i>Examples for REPO connector connections</i>	14
6.	PROTECTION LEVEL IP 21 (OPTIONAL)	15

1. GENERAL DESCRIPTION

The SENTINEL PRO family UPS is an online single phase unit, with power levels of up to 3 kVA, in a cabinet tower configuration of two different sizes based on the power required.

That UPS is designed to be configured for various operating modes:

- **ON-LINE** is the operating mode which offers maximum load protection and the best output waveform quality (*)
- **ECO** is the operating mode which offers the least UPS consumption, or rather maximum efficiency (**)
- **SMART ACTIVE** is the operating mode which allows the UPS to decide whether to enable ON-LINE or ECO functionality, based on a statistic regarding the quality of the Power Supply network.
- **STAND-BY OFF [Mode 1]** is the operating mode in which the UPS functions as an emergency device. While power is present the UPS does not intervene. In the event of a blackout, the necessary power is provided by the UPS.

(*) the effective values (rms) of the voltage and the output frequency are constantly controlled by the microprocessor independently with respect to the waveform of the network voltage, thereby maintaining the output frequency synchronized with the network within a configurable interval.

Outside of this interval, the UPS eliminates its synchronism with the network and brings itself to its nominal frequency; under these conditions, the UPS cannot utilize the bypass.

(**) In order to optimize yield, the load is normally powered by the bypass in ECO mode. In the event that the network should move outside of the pre-set tolerances, the UPS will switch to ON LINE functionality. Once the network has moved back within the pre-set tolerances for at least five minutes, the UPS will go back to powering the load through the bypass.

ADDITIONAL FUNCTIONS

- **MANUAL BYPASS**

The Manual Bypass function allows the UPS to be switched to the bypass line. In this configuration, the load is powered directly by the input network and any network disruptions will have a direct effect on the load.

This family of UPS units is completed with relative battery cabinets.

The BB36 and BB72 Battery Boxes have the same aesthetic design as the UPS units and are capable of housing one or two battery branches in parallel.

The BB36-B1 and BB72-B1 Battery Boxes are larger battery cabinets which are suitable for housing 40 Ah batteries.

Both Battery Box versions are available without batteries. These versions come complete with all of the required kits so that the user can decide upon the most suitable configuration to meet his/her needs.

All of the Battery Box versions are supplied without battery charger boards.

For increased recharging current, ER version UPS units are available, which contain high-powered battery charger boards instead of batteries.

1.1. Main features of the UPS unit

The main features of the SENTINEL PRO series include:

- VFI (On-line) / pure sinusoidal waveform during battery-powered functionality
- Output frequency with automatic selection (auto-sensing)
- Front/rear ventilation
- LCD display
- UPS with configurable and customizable functions (i.e. by-pass thresholds, automatic testing, acoustic alarm, etc.) through proprietary configuration software
- Protected battery expansion connector
- Unlimited expandability of autonomy with dedicated or custom Battery Boxes
- Expansion slot for communication cards (i.e. second USB and RS232 Port, SNMP, ModBus, etc.)
- RS232 and USB communication ports
- Frequency converter mode with a derating of 30%
- “Free Running” mode with a derating of 30%
- Eco mode function with 98% yield

1.2. Standard Versions

- 700 VA – 630 W – PF 0.9 – 2 batteries, 12 V, 7 Ah – small cabinet
- 1000 VA – 900 W – PF 0.9 – 3 batteries, 12 V, 7 Ah – small cabinet – with battery expansion
- 1500 VA – 1350 W – PF 0.9 – 3 batteries, 12 V, 9 Ah – small cabinet
- 2200 VA – 1980 W – PF 0.9 – 6 batteries, 12 V, 7 Ah – large cabinet – with battery expansion
- 3000 VA – 2700 W – PF 0.9 – 6 batteries, 12 V, 9 Ah – large cabinet - with battery expansion

1.3. ER Versions for extended autonomy


- 1000 VA ER, 2200 VA ER, 3000 VA ER
- Same features as the standard version
- Recharging battery current 6 A

2. SENTINEL PRO SERIES UPS AESTHETICS

2.1. SENTINEL PRO front panel







- Chassis reference colour: Pantone Black 6U
- Colour of the silver parts: RAL 9006

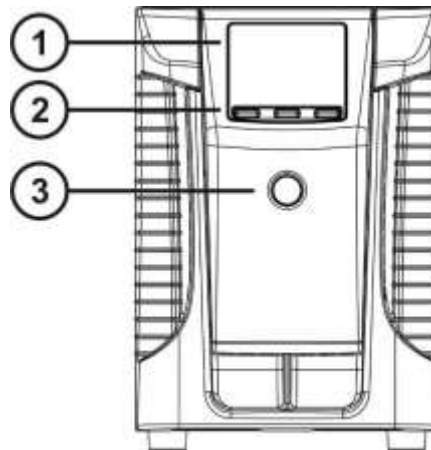

1. Display
2. Multifunction keys
3. ON/OFF button

2.2. SENTINEL PRO rear panel

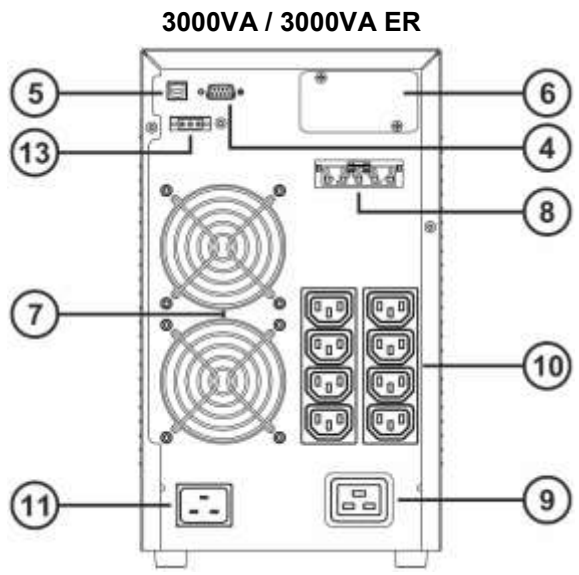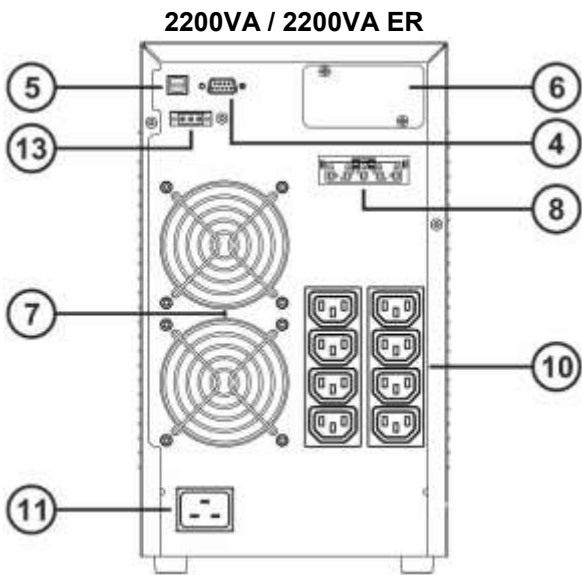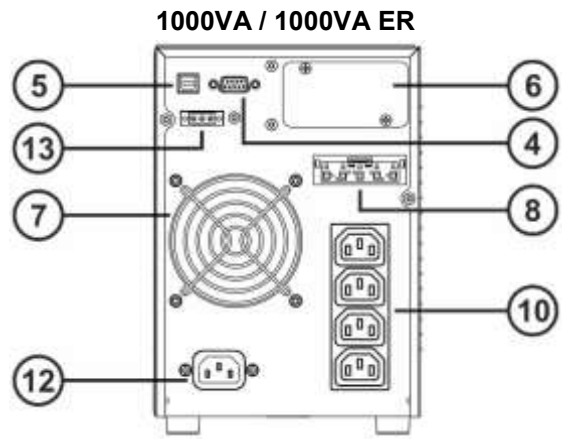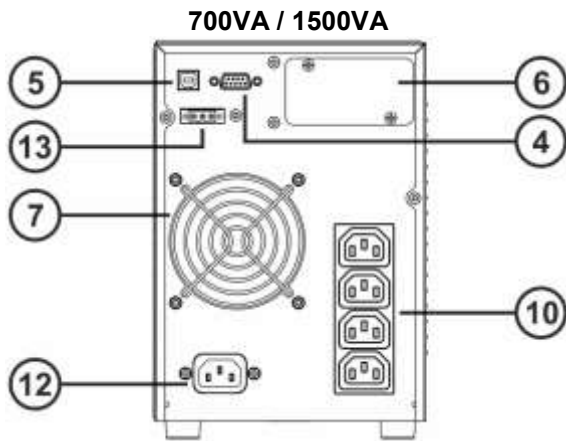


- 4. RS232 communication port and opto-isolated contacts
- 5. USB Port
- 6. Expansion slot
- 7. Cooling fans
- 8. Battery expansion connector
- 9. IEC 16 A output socket
- 10. IEC 10 A output socket
- 11. IEC 16 A input plug
- 12. IEC 10 A input plug
- 13. REPO connector

2.3. Battery Box front panel




2.4. Battery Box rear panel

36 V Battery Box

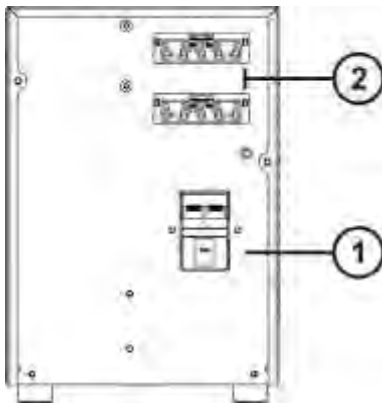


72 V Battery Box

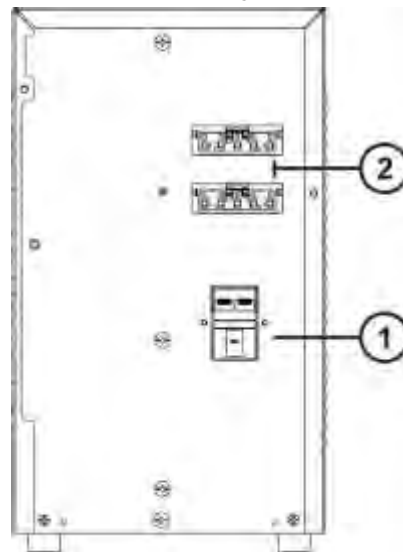


- 1. Battery disconnection switch (SWBATT)
- 2. Battery expansion connector

2.5. BBox T12 rear panel

36 V Battery Box

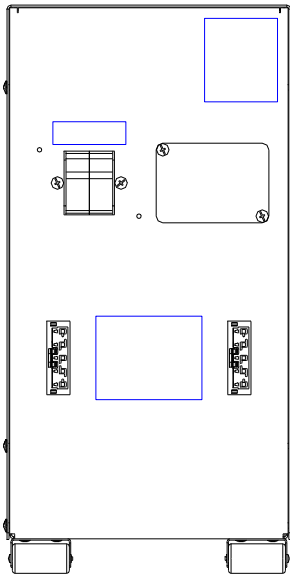

72 V Battery Box

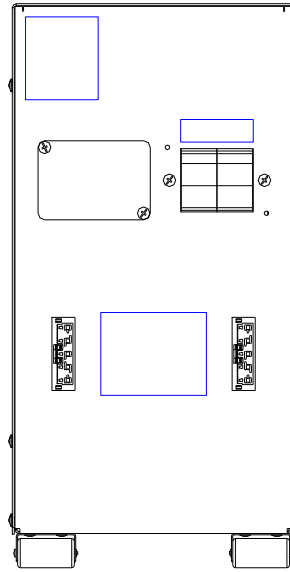

- 1. Battery disconnection switch (SWBATT)
- 2. Battery expansion connector

3. TECHNICAL DATA TABLE

3.1. SENTINEL PRO UPS

SENTINEL PRO UPS		700 VA	1000 VA	1500 VA	2200 VA	3000 VA
			1000 VA ER		2200 VA ER	3000 VA ER
INPUT						
Rated voltage	[Vac]	220 - 230 – 240				
Maximum allowed input voltage	[Vac]	300				
Voltage range for no battery intervention (configurable through UPSTools)		Maximum: 276 Vac Minimum: 184 Vac AT 100% load Minimum: 184 Vac ÷ 140 Vac (from 100% to 50% load in linear mode) Return to network powered functionality: 190 Vac				
Rated frequency	[Hz]	50 – 60				
Power factor		≥ 0.98				
Current distortion @ maximum load		≤ 7%				
Maximum current@184 Vac (1)	[A]	4	5,8	8,2	12	16
Rated current@220 Vac (2)	[A]	3,3	4,7	6,9	10,1	13,6
Circuit breaker	[A]	7	7	10	12	16
Rated current (only for ER versions) @220 Vac(2)	[A]	N/A	5,7	N/A	12,2	14,1

(1) @ rated load, minimum voltage of 184 Vac, battery charging

(2) @ rated load, rated voltage of 220 Vac, battery charging

SENTINEL PRO UPS		700 VA	1000 VA	1500 VA	2200 VA	3000 VA
			1000 VA ER		2200 VA ER	3000 VA ER
BYPASS						
Accepted voltage range for switching	[Vac]	Minimum configurable threshold: 180 ÷ 200 Maximum configurable threshold: 250 ÷ 264				
Accepted frequency range for inverter synchronization		Selectable: 3% ÷ 10% Default: ±5%				
Switching time	[ms]	Typical: 4				
BATTERY						
Number of batteries / V	[no.] / [V]	2 / 12	3 / 12	3 / 12	6 / 12	6 / 12
Standard capacity	[Ah]	7 (a)	7 (a)	9 (b)	7 (a)	9 (b)
Charging current @ UPS ON with fan at maximum speed	[A]	1	1	1	1,1	1,1
Charging time (c)	[h]	<4 for 80% of the load				
Expandability and rated voltage of the Battery Box		Not expandable	36 Vdc	Not expandable	72 Vdc	72 Vdc
Charging current (only for ER versions)		N/A	6 A (d)	N/A	6 A (d)	6 A (d)

 (a) 12 V / 7 Ah Batteries: **CSB GP1272-F2** or **CSB GP1272(28W)** or **CSB UPS12360-7** or **YUASA NPW36-12**

 (b) 12 V / 9 Ah Batteries: **CSB HR1234W-F2** or **YUASA NPW45-12**

(c) For the ER versions, the charging time depends on the batteries installed in the Battery Box

 (d) The charging current depends on the input voltage and the internal temperature of the UPS. Under normal conditions, temperature derating of about 2-3 A may occur
 In order to select the minimum capacity of the Battery Box, verify the maximum charging current accepted by the batteries.



SENTINEL PRO UPS	700 VA	1000 VA	1500 VA	2200 VA	3000 VA	
		1000 VA ER		2200 VA ER	3000 VA ER	
OUTPUT						
Rated voltage	[Vac]	Selectable: 220 / 230 / 240				
Static variation (3)		1.5%				
Dynamic variation (4)		≤5% in 20 ms				
Waveform		Sinusoidal				
Voltage distortion @ linear load		≤ 2%				
Voltage distortion @ distorting load		≤ 5%				
Frequency (5)	[Hz]	Selectable: 50 / 60 / automatic detection				
Current crest factor		≥ 3:1				
Rated power	[VA]	700	1000	1500 VA	2200	3000
Rated power	[W]	630	900	1350	1980	2700
Derating: Frequency converter / forced frequency de-synchronization		-30%				
Overload: 100% <load <110%		Bypass line available: activates the bypass after 2 sec. shutdown after 120 sec. Bypass line unavailable: shutdown after 60 sec.				
Overload: 110% <load <150%		Bypass line available: activates the bypass after 2 sec. shutdown after 4 sec. Bypass line unavailable: shutdown after 4 sec.				
Load overload >150%		Bypass line available: activates the bypass instantaneously shutdown after 1 sec. Bypass line unavailable: shutdown after 0.5 sec.				
Inverter short circuit		Short circuit current ≤ Power [VA] / 220 V x 2 shutdown after 300 ms				

(3) Network/Battery @ 0% - 100% load

(4) @ Network / battery / network @ 0% / 100% / 0% resistive load

(5) If the network frequency is within ±5% of the selected value, the UPS is synchronized with the network. If the frequency is off tolerance or battery-powered functionality is enabled, the frequency is that which is selected +0.1%

SENTINEL PRO UPS		700 VA	1000 VA	1500 VA	2200 VA	3000 VA
			1000 VA ER		2200 VA ER	3000 VA ER
AUTONOMIES						
Measured autonomy @ 100% linear load – only internal batteries		4'10"	5'	4'10"	4'10"	4'10"
MISCELLANEOUS						
Leakage current to ground	[mA]	≤ 1.5			≤ 2	
AC/AC yield in ON-LINE mode		88,4%	89,2%	91,7%	92,4%	93,2%
Automatic consumption in ECO mode (batteries disconnected)		10,5 W	10,5 W	10,5 W	12 W	12 W
DC/AC yield in BATTERY mode		86,3%	88,0%	88,3%	90%	90,4%
Automatic consumption from the network (batteries disconnected)		42 W	29 W	38 W	44 W	58 W
Automatic consumption in Stand-by mode (batteries disconnected)		6 W	6 W	6 W	6 W	14 W
Automatic consumption with on/off switch turned off		0,1 W	0,1 W	0,1 W	0,4 W	0,4 W
Power loss with resistive nominal load	[W]	80	107	121	161	202
	[BTU/h]	270	367	416	550	690
	[kcal/h]	68	93	105	139	174
Operating room temperature (6)	[°C]	0 – 40				
Humidity		< 90% without condensation				
Installation height		Operation: 1000 m at nominal power (-1% power for every 100 m above 1000 m) 4000 m maximum Transport: <15000 m				
Protection devices		Excessive battery discharge – overcurrent – short circuit – over voltage – undervoltage – thermal				
Overvoltage protection		2 VDR x 300 Joule				
Noise levels		<40 dB(A) at 1 m				
Dimensions L x D x H	[mm]	158 x 422 x 235			190 x 446 x 333	
Packaging dimensions L x D x H	[mm]	245 x 500 x 340			325 x 585 x 470	
Net weight	[kg]	11	13	14	26	28
Gross weight	[kg]	12.5	14.5	15.5	29	31
Net weight (only for ER versions)	[kg]	N/A	7	N/A	14	15
Gross weight (only for ER versions)	[kg]	N/A	8.5	N/A	17	18

SENTINEL PRO UPS	700 VA	1000 VA	1500 VA	2200 VA	3000 VA
		1000 VA ER		2200 VA ER	3000 VA ER
ADDITIONAL INFORMATION					
Safety compliance		EN 62040-1 and 2006/95/EC Directives			
EMC compliance		EN 62040-2 cat. C2 and 2004/108/EC Directives			
Certifications		 			


3.2. T10 Battery Box

T10 BATTERY BOX		AB36-M1	BB36-A3	BB36-M1	AB72-M1	BB72-A3	BB72-M1
Rated battery voltage	[Vdc]	36			72		
Number of batteries / V	[no.]/[V]	0 / 12	3 / 12	3+3 / 12	0 / 12	6 / 12	6+6 / 12
Standard capacity	Ah	0	7	14	0	7	14
Dimensions L x D x H	[mm]	158 x 422 x 235			190 x 446 x 333		
Packaging dimensions L x D x H	[mm]	245 x 500 x 340			325 x 585 x 470		
Net weight	[kg]	6	14	21	12	27	41
Gross weight	[kg]	7	15	22	14	29	43

3.3. T12 Battery Box

T12 BATTERY BOX		BB36-B1	BB72-B1	AB72-B1
Rated battery voltage	[Vdc]	36	72	36 / 72
Number of batteries / V	[no.]/[V]	3 / 12	6 / 12	0 / 12
Standard capacity	Ah	40	40	0
Dimensions L x D x H	[mm]	158 x 422 x 235		
Packaging dimensions L x D x H	[mm]	590 x 320 x 760		
Net weight	[kg]	55	100	10
Gross weight	[kg]	65	110	20

4. BLOCK DIAGRAM

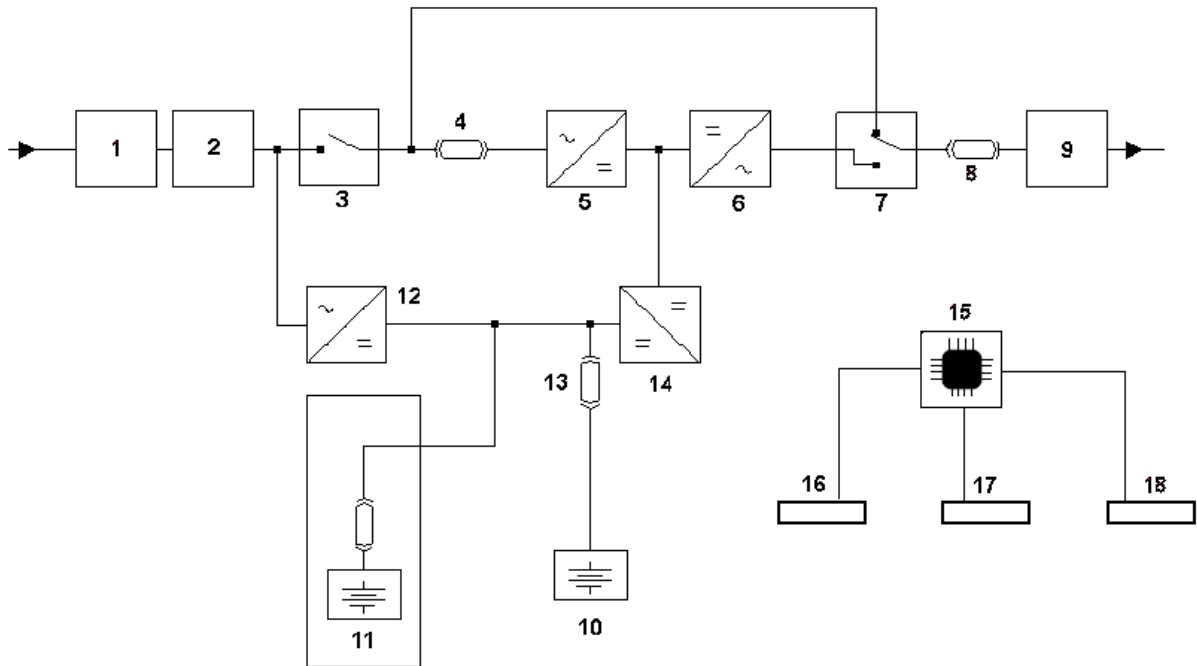


- 1) Resettable Input protection
- 2) Input filter
- 3) Back-feed relay
- 4) Input fuse
- 5) Rectifier
- 6) Inverter
- 7) Automatic By-pass
- 8) Output fuse (only for 2.2 and 3 kVA models)
- 9) Output filter (only for 2.2 and 3 kVA models)
- 10) Batteries
- 11) External batteries (optional)
- 12) Battery charger
- 13) Batteries fuse
- 14) DC/DC Boost
- 15) Microprocessor
- 16) Communication slot
- 17) RS232 and USB interface
- 18) LCD Display

5. COMMUNICATION PORTS AND FIRMWARE

The UPS comes with a standard RS232 port with input and output signals, a USB Port and an expansion slot for connecting additional electronic boards.

RS232 Connector

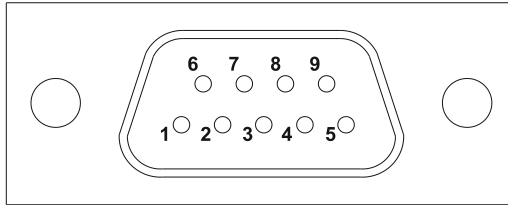
RS232 CONNECTOR


PIN #	SIGNAL	NOTES
1	Programmable output*: [default: UPS shutdown]	(*) Opto-isolated contact max. +30 Vdc / 35 mA. These contacts can be associated with other events using the appropriate software For additional information about interfacing with the UPS unit, please refer to the appropriate manual
2	TXD	
3	RXD	
4	NC	
5	GND	
6	DC Power Supply (Imax = 20 mA)	
7	NC	
8	Programmable output*: [default: discharge pre-alarm]	
9	Programmable output*: [default: battery-powered functionality]	

Communications Slot


The UPS comes supplied with an expansion slot for optional communication cards (see the diagram on the right), which can allow the device to communicate using the most common communication standards. Some examples include:

- Additional RS232 and USB communication ports
- Serial duplicator
- Ethernet network card with TCP/IP, HTTP and SNMP protocols
- JBUS / MODBUS protocol converter card
- PROFIBUS protocol converter card
- Card with isolated relay contacts

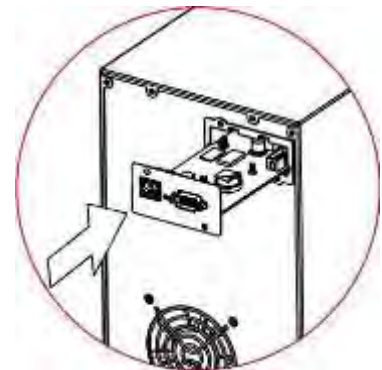

Please consult the website www.riello-ups.com to check the availability of additional accessories

5.1. Examples for connecting signals through the RS232 port

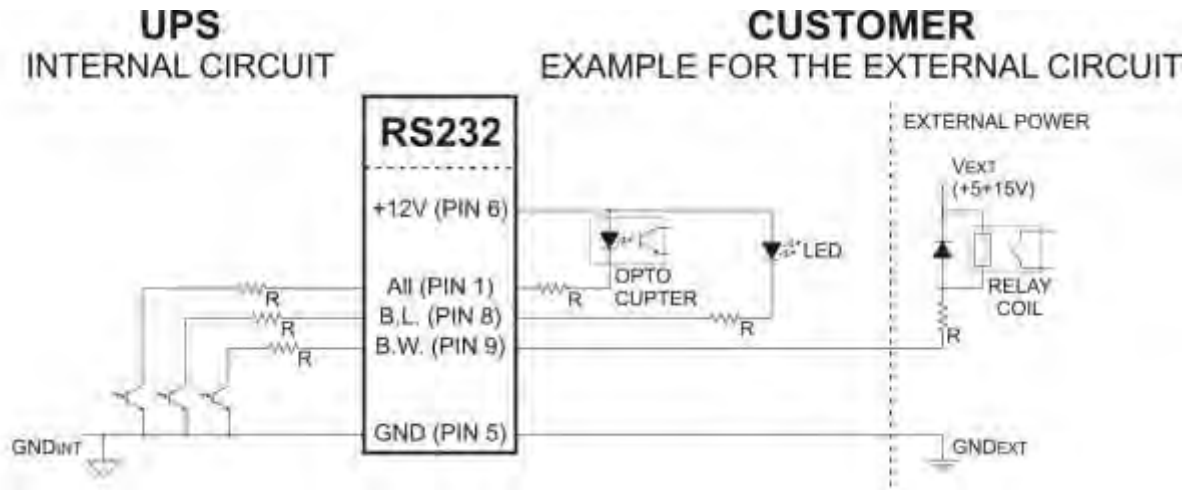

5.2. **Technical data for “pin 6” power through the RS232 port**

The voltage provided by the serial port’s 6pin power depends on the absorbed current.


Vcc max: 10.8 Vdc without load
 Vcc min: 8 Vdc @ 25 mA

5.3. Firmware




The firmware of the UPS unit can be updated by inserting the appropriate programming card into the expansion slot. This operation must be carried out by authorized personnel.

5.4. Examples for REPO connector connections

Connections for REPO functionality and remote ON/OFF

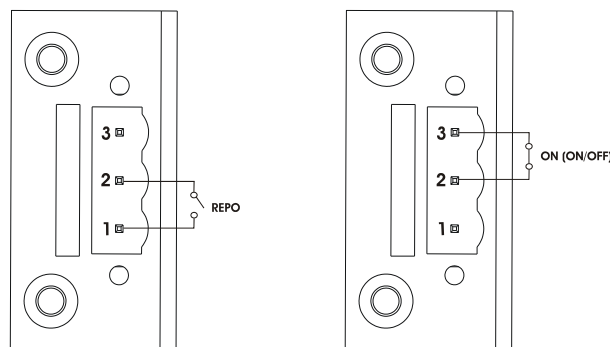

6. PROTECTION LEVEL IP21 (OPTIONAL)

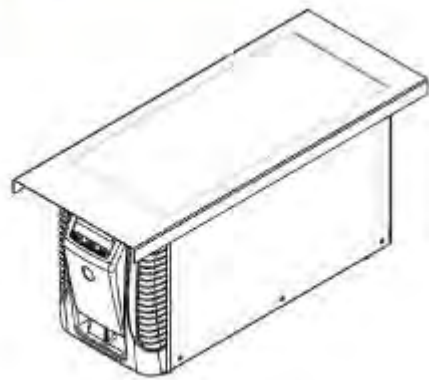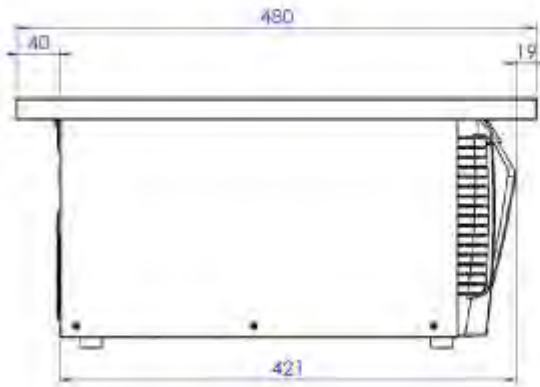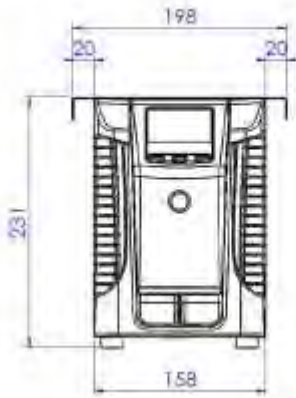



www.riello-ups.com